

# Li-Lo

## FLAT RAINWATER TANK

The Li-Lo tankseries for shallow excavation!



2 friends



2 spades



1 morning

# How do you install a tank?

It's as easy as 1, 2, 3.



80%\* less digging compared with a cylindric cistern.

Save more than 150\* wheelbarrow loads of soil!




Li-Lo 3000 l



Low installation depth – so no slope angle required

Excavation approx 7.6 m<sup>3</sup> / 268 ft<sup>3</sup>

Cylindric cistern 3000 L

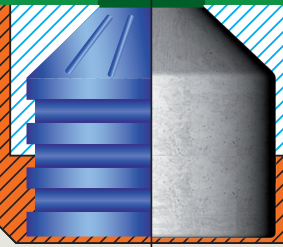

Picture simplified

Excavation approx 49 m<sup>3</sup> / 1730 ft<sup>3</sup>

\* Based on a vertical, cylindric cistern with a useable volume of 3000 ltr, a height of 1,90 mtr and a diameter of 2,20 mtr. Calculation of excavation is under consideration of a ditch bottom of 10 cm, a sidewise distance of 50 cm and a slope with 45° gradient according to DIN 4124.


## The perfect solution

- ✓ Patented technology!
- ✓ State of the art rain water harvesting technology
- ✓ Amazing German engineered underground tank system
- ✓ Stunning technology with self cleaning filter
- ✓ Simple to install – very low maintenance




## Technical data


Measurements/weights	1500 l 450 US-Gal	3000 l 800 US-Gal	5000 l 1350 US-Gal
<b>Order Code</b>	200050	200051	200052
Length [l]	2100 mm (82,6")	2450 mm (49,2")	2890 mm (113,77")
Width [w]	1250 mm (49,2")	2100 mm (82,67")	2300 mm (90,55")
Height of tank shoulder [h]	700 mm (27,5")	735 mm (28,9")	950 mm (37,4")
Height of dome collar [hd]	315 mm (12,4")	315 mm (12,4")	315 mm (12,4")
Ø inlet [e]	650 mm (25,96")	650 mm (25,96")	650 mm (25,96")
Ø tank dome [d]	800 mm (31,49")	800 mm (31,49")	800 mm (31,49")
Weight approx.	80 kg	170 kg	240 kg
Pounds/lbS	176,36	374,77	529,1

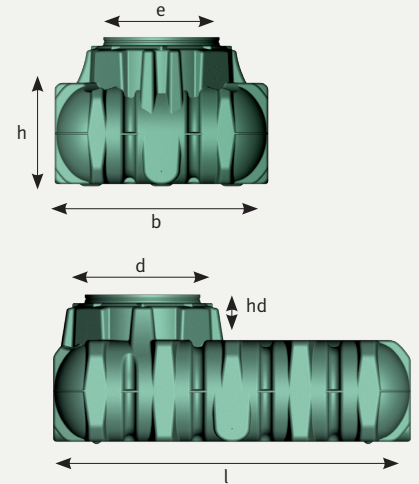


## Tank only packages

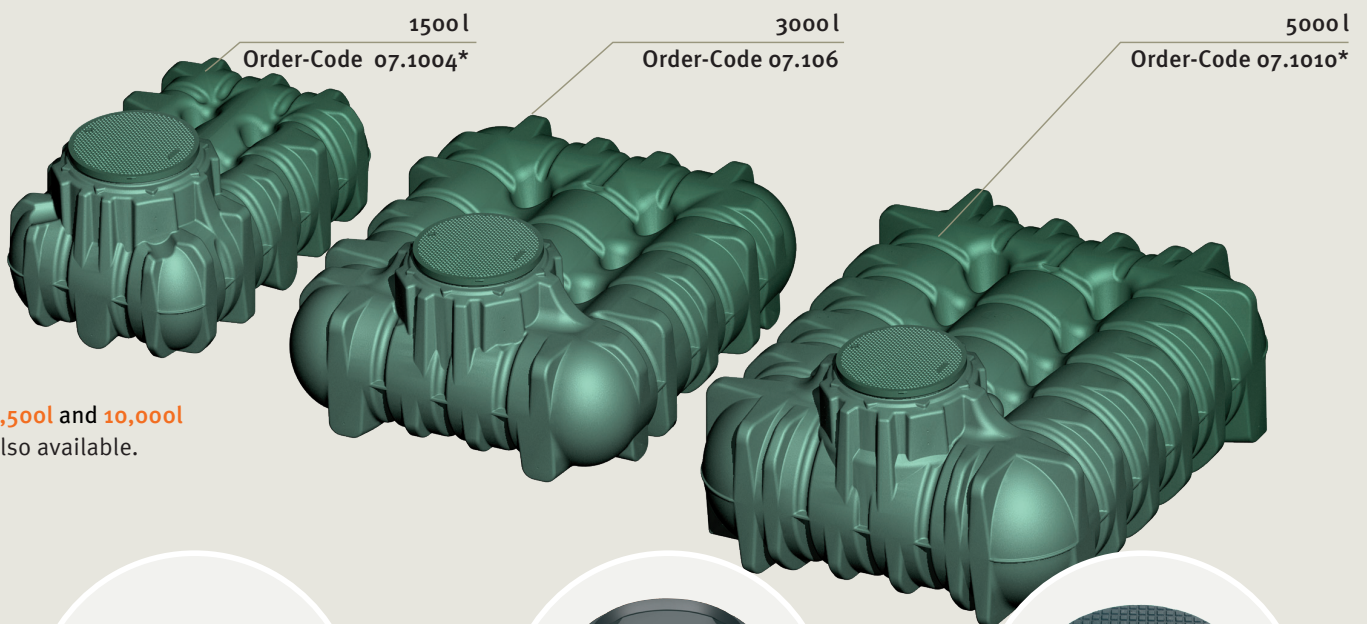

7,500l and 10,000l  
also available.

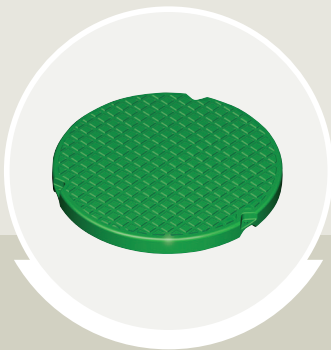

**\*Includes PE lid:**  
**PE lid double-walled**  
with childproof lock  
Colour: grass green  
Ø 70 cm

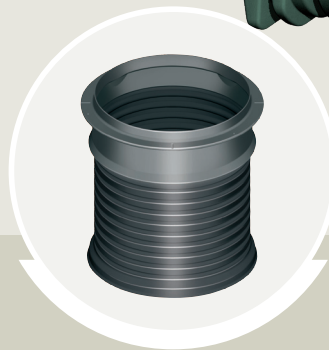


**Accessory:**  
**The perfect tank covering**  
The standard Li-Lo telescopic dome shaft  
can be telescoped and shortened in a  
continuously variable manner. Ø 60 cm,  
adjustable from 22-70 cm.  
**Order no. 202057**



**Accessory:**  
**Car module**  
Class B125/DIN EN 124 (in combination  
with Li-Lo telescopic dome shaft),  
consisting of cast cover with a Ø of 69 cm  
and cast frame with a Ø of 78 cm.  
**Order no. 202059**

# Rainwater Harvesting with the Li-Lo underground tank

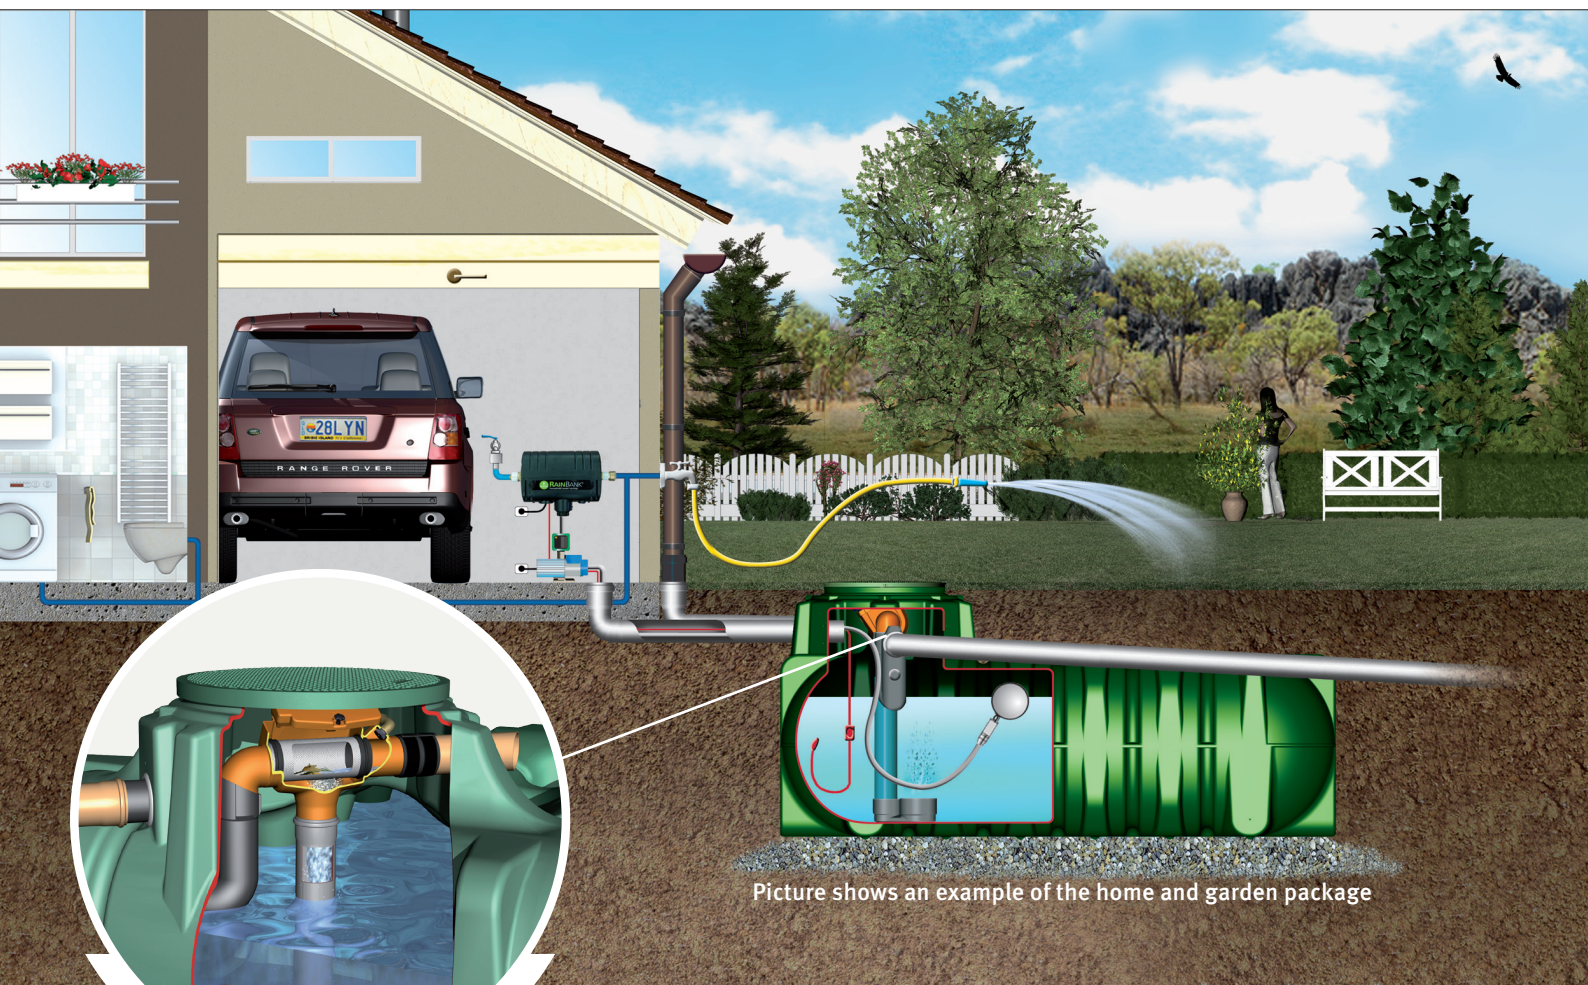

Picture shows an example of the home and garden package

## SUPRA internal filter

- Provides over 95% water yield
- Self cleaning filter
- Space saving filter technology inside the tank
- Can manage roof areas up to 350 sqm
- Stainless steel filter insert 0.35 mm

## Garden Tank and Filter Package

### Scope of supply:

- Garden Tank, plus
- Supra Filter package (0.35 mm stainless steel mesh filter system-self cleaning)

## Home and Garden Package

### Scope of supply:

- Garden Tank and Filter Package, plus
- Stainless steel submersible pump and automatic rainwater controller (watermark approved)